



11CF

Quick-acting


RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

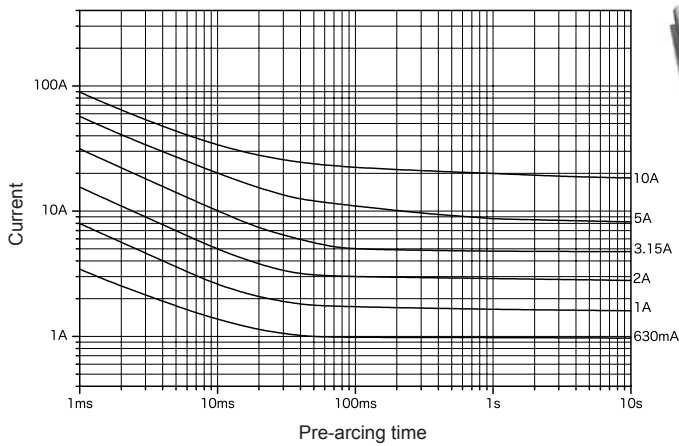

Land pattern for reflow soldering (reference dimensions)



Scale: 8/1 (mm)

| Rated voltage | Certification | Rated current (I_N) *1 | Rated breaking current | | Temp. rise | Current carrying capacity | Overload operation |
|---------------|---------------|-------------------------------|------------------------|-------------------|---------------------------|--|--------------------------|
| DC 72 V | | 100 mA–10 A | 50 A | Resistive circuit | 75 K or less at 1.0 I_N | 1.0 I_N until temperature stabilization occurs | Within 60 s at 2.0 I_N |

*1: Customer-requested rated current values can be supplied from within the given range.



11CT

Inrush-withstand


RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

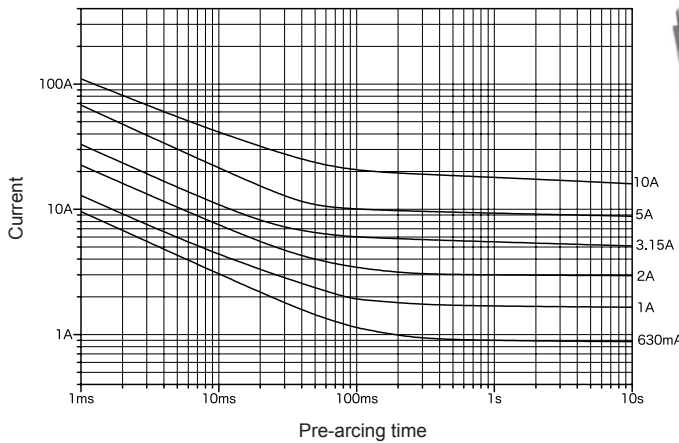

Land pattern for reflow soldering (reference dimensions)



Scale: 8/1 (mm)

| Rated voltage | Certification | Rated current (I_N) *1 | Rated breaking current | | Temp. rise | Current carrying capacity | Overload operation |
|---------------|---------------|-------------------------------|------------------------|-------------------|---------------------------|--|--------------------------|
| DC 72 V | | 100 mA–10 A | 50 A | Resistive circuit | 75 K or less at 1.0 I_N | 1.0 I_N until temperature stabilization occurs | Within 60 s at 2.0 I_N |

*1: Customer-requested rated current values can be supplied from within the given range.