



DC35V11CT

Inrush-withstand


RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

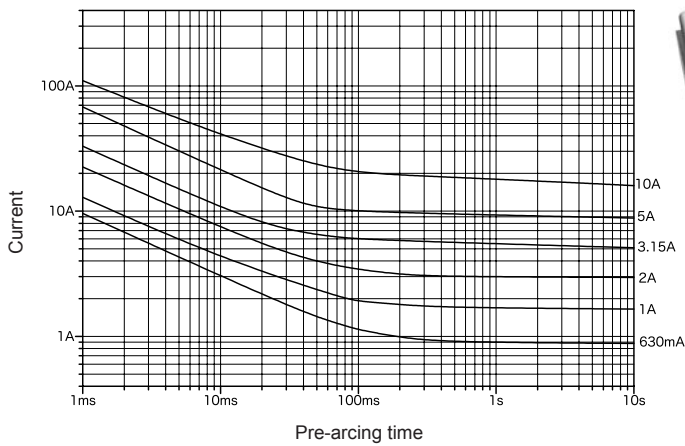

Land pattern for reflow soldering (reference dimensions)



Scale: 8/1 (mm)

Rated voltage	Certification	Rated current (I_N) *1	Rated breaking current		Temp. rise	Current carrying capacity	Overload operation
DC 35 V		100 mA–10 A	50 A	Resistive circuit	75 K or less at 1.0 I_N	1.0 I_N until temperature stabilization occurs	Within 60 s at 2.0 I_N

*1: Customer-requested rated current values can be supplied from within the given range.



DC86V11CT

Inrush-withstand


RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

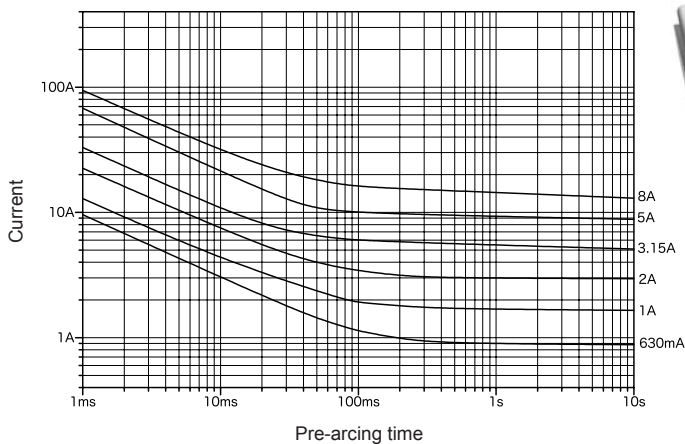

Land pattern for reflow soldering (reference dimensions)



Scale: 8/1 (mm)

Rated voltage	Certification	Rated current (I_N) *1	Rated breaking current		Temp. rise	Current carrying capacity	Overload operation
DC 86 V		100 mA–8 A	50 A	Resistive circuit	75 K or less at 1.0 I_N	1.0 I_N until temperature stabilization occurs	Within 60 s at 2.0 I_N

*1: Customer-requested rated current values can be supplied from within the given range.