

# DC35VP11CF




Protector

Quick-acting

RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

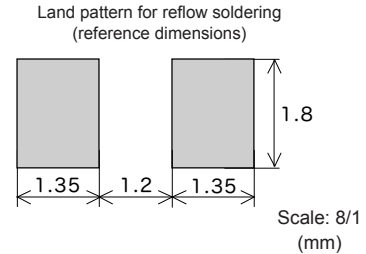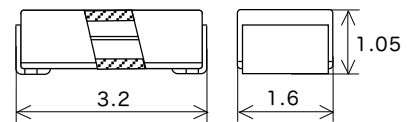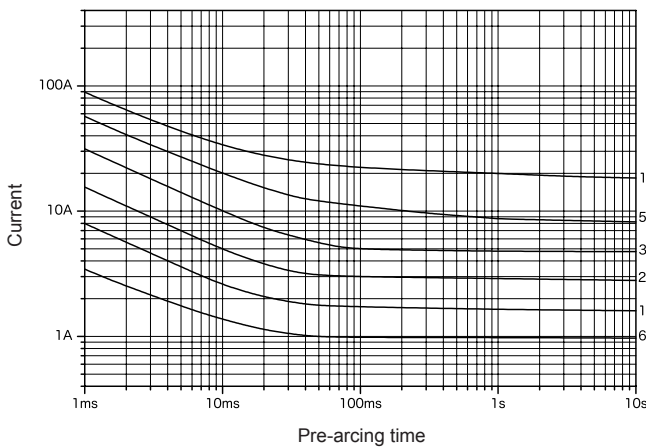

Maximum working voltage	Certification	Rated current (I <sub>N</sub> ) *1	Maximum breaking current		Temp. rise	Current carrying capacity	Overload operation
DC 35 V	-	100 mA–10 A	50 A	Resistive circuit	75 K or less at 1.0 I <sub>N</sub>	1.0 I <sub>N</sub> until temperature stabilization occurs	Within 60 s at 2.0 I <sub>N</sub>

\*1: Customer-requested rated current values can be supplied from within the given range.

Note: The rated current (in amperes) multiplied by 1,000 is indicated on the product and its packaging (e.g., "630" for the 0.63 A version). The product name is the type name followed by this value.

# DC35VP11CT




Protector

Inrush-withstand

RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

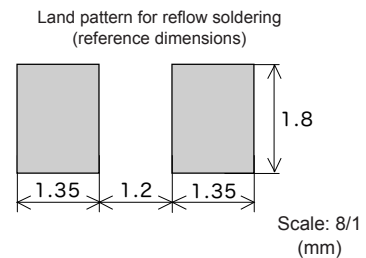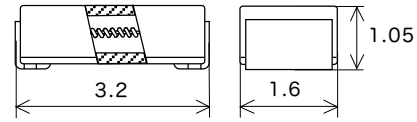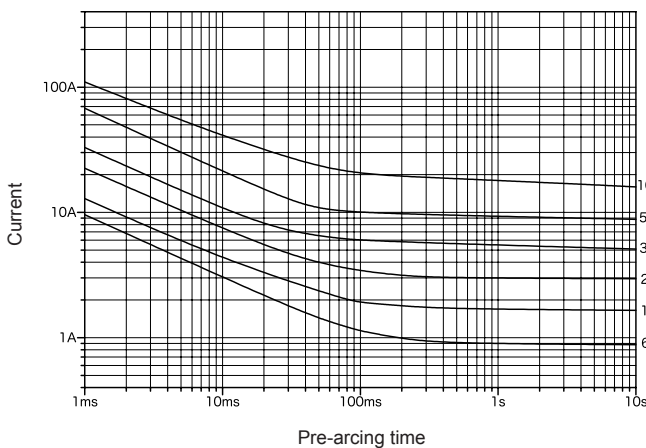

Maximum working voltage	Certification	Rated current (I <sub>N</sub> ) *1	Maximum breaking current		Temp. rise	Current carrying capacity	Overload operation
DC 35 V	-	100 mA–10 A	50 A	Resistive circuit	75 K or less at 1.0 I <sub>N</sub>	1.0 I <sub>N</sub> until temperature stabilization occurs	Within 60 s at 2.0 I <sub>N</sub>

\*1: Customer-requested rated current values can be supplied from within the given range.

Note: The rated current (in amperes) multiplied by 1,000 is indicated on the product and its packaging (e.g., "630" for the 0.63 A version). The product name is the type name followed by this value.