

# DC35VP25CF




Protector

Quick-acting

RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

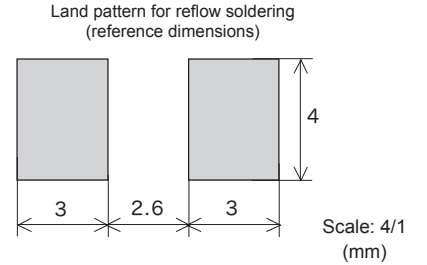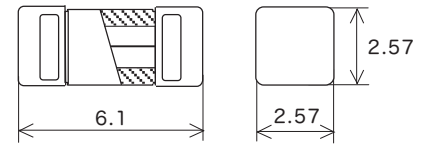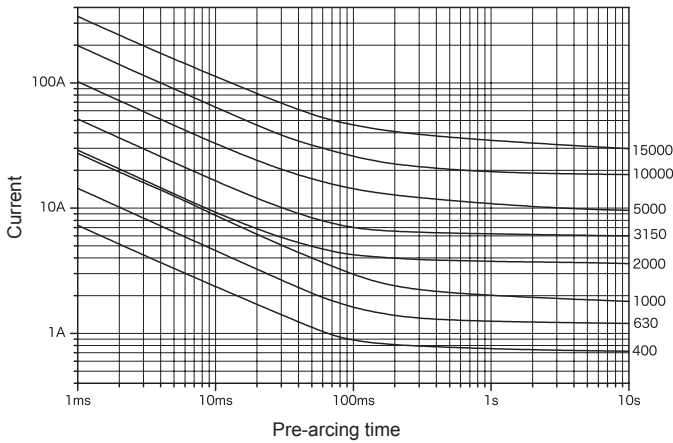

Maximum working voltage	Certification	Rated current ( $I_N$ ) *1	Maximum breaking current	Temp. rise	Current carrying capacity	Overload operation
DC 35 V	-	63 mA–10 A	50 A	Resistive circuit	1.0 $I_N$ until temperature stabilization occurs	Within 60 s at 2.0 $I_N$
		Over 10 A–15 A				
		Over 15 A–18 A				
				75 K or less at 1.0 $I_N$		
				100 K or less at 1.0 $I_N$		
				75 K or less at 1.0 $I_N$		

\*1: Customer-requested rated current values can be supplied from within the given range.

Note: The rated current (in amperes) multiplied by 1,000 is indicated on the product and its packaging (e.g., "630" for the 0.63 A version). The product name is the type name followed by this value.

# DC35VP25CT




Protector

Inrush-withstand

RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

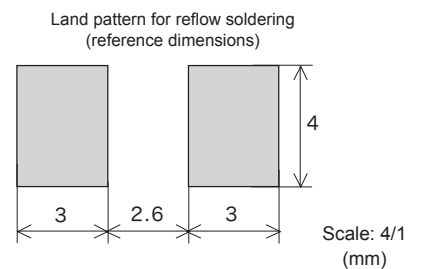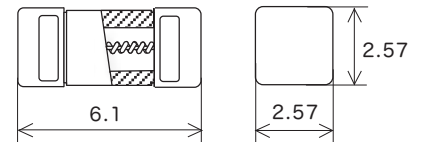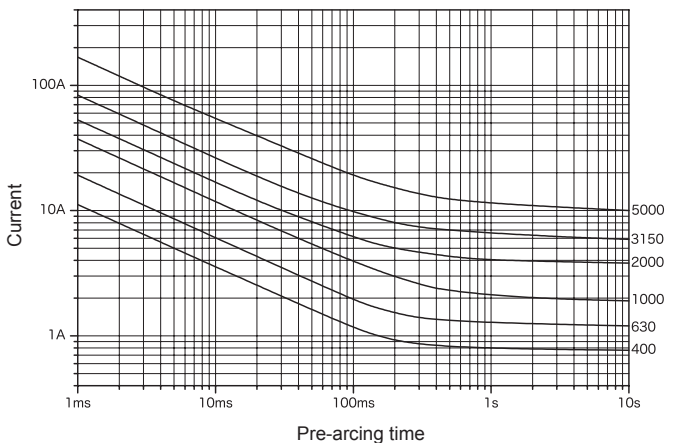

Maximum working voltage	Certification	Rated current ( $I_N$ ) *1	Maximum breaking current	Temp. rise	Current carrying capacity	Overload operation
DC 35 V	-	100 mA–5 A	50 A	Resistive circuit	1.0 $I_N$ until temperature stabilization occurs	Within 60 s at 2.0 $I_N$
				75 K or less at 1.0 $I_N$		

\*1: Customer-requested rated current values can be supplied from within the given range.

Note: The rated current (in amperes) multiplied by 1,000 is indicated on the product and its packaging (e.g., "630" for the 0.63 A version). The product name is the type name followed by this value.