



MCF2


Quick-acting

RoHS-compliant*2

Representative pre-arcing time-current characteristics

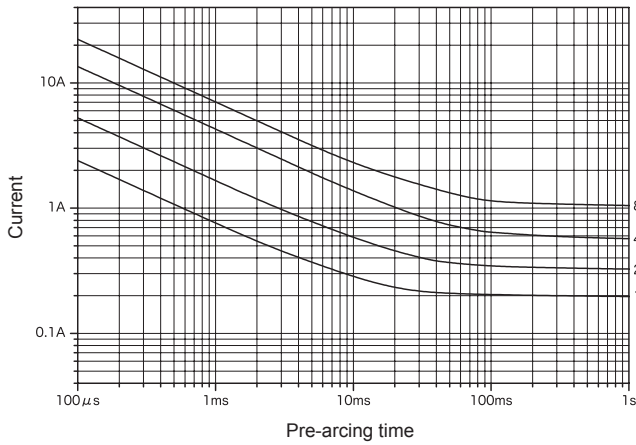

Land pattern for reflow soldering (reference dimensions)



Scale: 5/1 (mm)

Rated voltage	Certification	Rated current (I _N) *1	Rated breaking current	Temp. rise	Current carrying capacity	Overload operation
AC 125 V	cULus	125 mA–1.25 A	50 A	75 K or less at 1.0 I _N	1.0 I _N until temperature stabilization occurs	Within 60 s at 2.0 I _N
DC 72 V						

*1: Customer-requested rated current values can be supplied from within the given range.

*2: This product uses high melting temperature type solder containing 85% by weight or more lead. This type of solder is exempted from the RoHS Directive.

Note: Although this product is not hermetically sealed, it does satisfy the requirements of MIL-STD-202G, Method 112E, Test Condition A.



MCF3

Quick-acting


RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

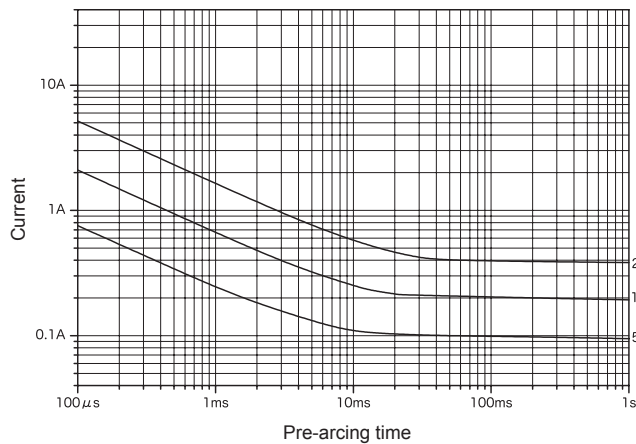

Land pattern for reflow soldering (reference dimensions)



Scale: 5/1 (mm)

Rated voltage	Certification	Rated current (I _N) *1	Rated breaking current	Temp. rise	Current carrying capacity	Overload operation
AC 32 V	cULus	28 mA–250 mA	50 A	75 K or less at 1.0 I _N	1.0 I _N until temperature stabilization occurs	Within 60 s at 2.0 I _N
DC 72 V						

*1: Customer-requested rated current values can be supplied from within the given range.