






Representative pre-arcing time-current characteristics

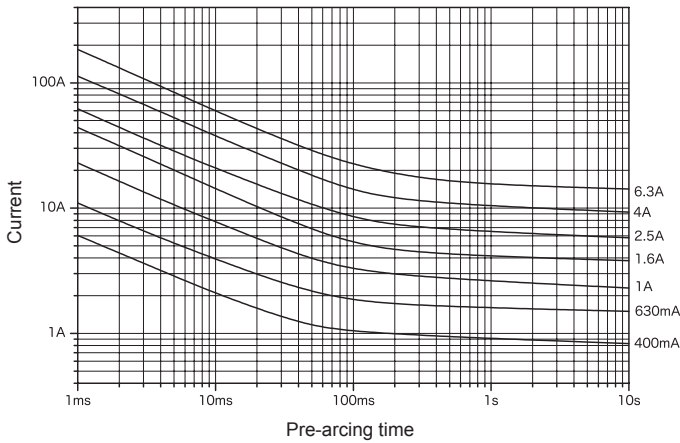

Scale: 1/1 (mm)

Rated voltage	Certification	Rated current (I_N)	Rated breaking current		Endurance test	Pre-arcing time-current characteristics
AC 250 V	  	400 mA 500 mA 630 mA 800 mA 1 A 1.25 A 1.6 A 2 A 2.5 A 3.15 A 4 A 5 A 6.3 A	1500 A	PF 0.7-0.8	*1	*2

*1: After 100 cycles of 1.2 I_N 1 h on / 15 min off, 1.5 I_N is passed through the fuse for 1 h.

*2:

Rated current	2.1 I_N	2.75 I_N	4.0 I_N	10 I_N
400 mA-3.15 A	Within 30 min	0.01 s-2 s	0.003 s-0.3 s	Within 0.02 s
4 A-6.3 A		0.01 s-3 s		