



Representative pre-arcing time-current characteristics

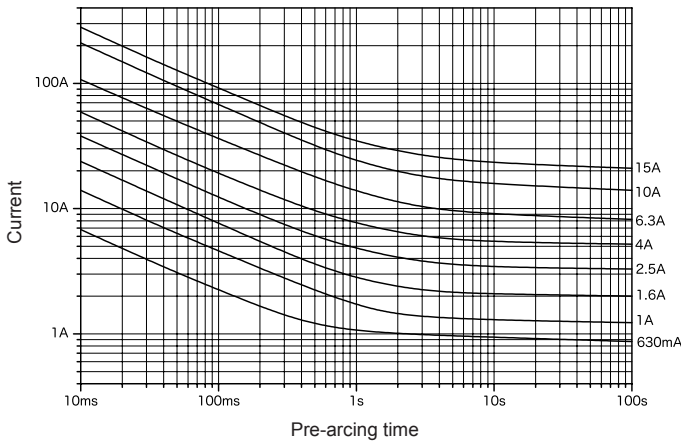

Scale: 1/1 (mm)

| Rated voltage | Certification | Rated current (I _N) *1 | Rated breaking current | | Temp. rise | Current carrying capacity | Overload operation |
|---------------|---------------|---------------------------------------|------------------------|-------------------|------------------------------------|--|--|
| AC 250 V | UL, SFA | 100 mA–3.5 A | 100 A | PF 0.7–0.8 | 70 K or less at 1.1 I _N | 1.1 I _N for 15 min or more after temperature stabilization occurs | Within 60 min at 1.35 I _N Within 2 min at 2.0 I _N |
| | RU | Over 3.5 A–8 A | | | | | |
| | | Over 8 A–15 A | | | | | |
| DC 125 V | UL | 100 mA–3.5 A | 500 A | Resistive circuit | 70 K or less at 1.1 I _N | 1.1 I _N for 15 min or more after temperature stabilization occurs | |
| | RU | Over 3.5 A–8 A | | | | | |
| | | Over 8 A–15 A | | | | | |

*1: Customer-requested rated current values can be supplied from within the given range.

*2: 100 mA–8 A Pb free
Over 8 A–15 A This product uses high melting temperature type solder containing 85% by weight or more lead. This type of solder is exempted from the RoHS Directive.