
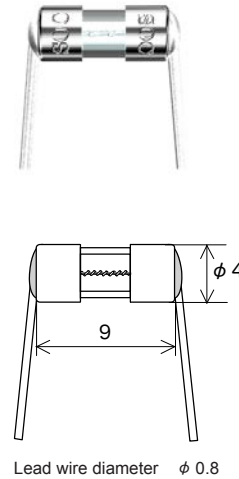


NT1

Inrush-withstand

RoHS-compliant*2

Representative pre-arcing time-current characteristics

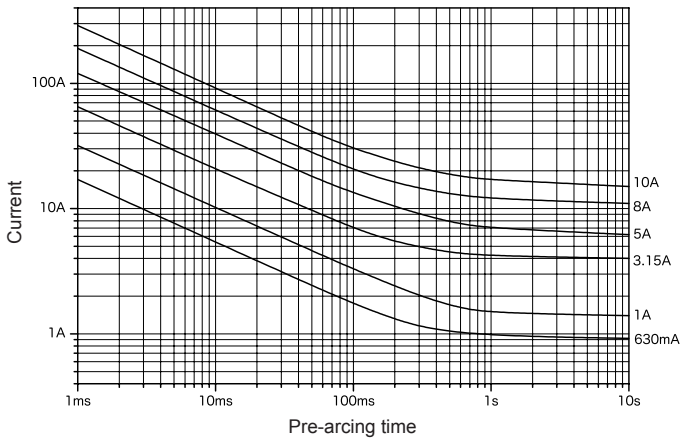

Scale: 2/1 (mm)

Rated voltage	Certification	Rated current (I _N) ^{*1}	Rated breaking current	Temp. rise	Current carrying capacity	Overload operation
AC 125 V		100 mA–10 A	50 A	70 K or less at 1.0 I _N	1.0 I _N for 15 min or more after temperature stabilization occurs	Within 10 min at 1.5 I _N Within 60 s 2.0 I _N

*1: Customer-requested rated current values can be supplied from within the given range.



*2: This product uses high melting temperature type solder containing 85% by weight or more lead. This type of solder is exempted from the RoHS Directive.

NT3

Inrush-withstand

RoHS-compliant*2

Representative pre-arcing time-current characteristics

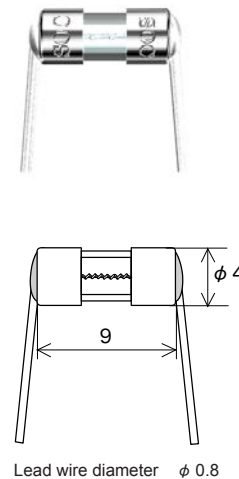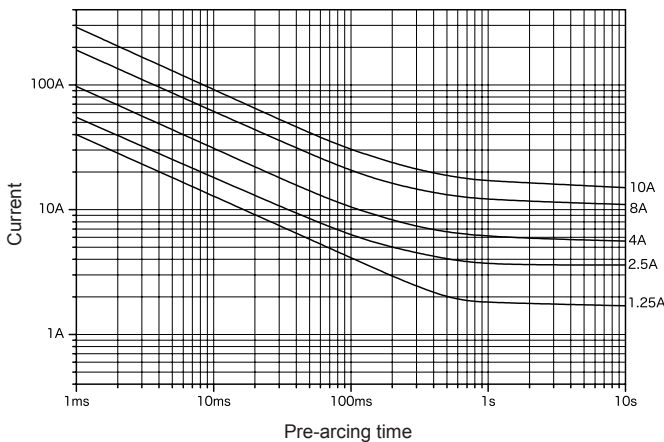

Scale: 2/1 (mm)

Rated voltage	Certification	Rated current (I _N) ^{*1}	Rated breaking current	Temp. rise	Current carrying capacity	Overload operation
AC 250V		100 mA–10 A	50 A	70 K or less at 1.0 I _N	1.0 I _N for 15 min or more after temperature stabilization occurs	Within 10 min at 1.5 I _N Within 60 s 2.0 I _N

*1: Customer-requested rated current values can be supplied from within the given range.

*2: This product uses high melting temperature type solder containing 85% by weight or more lead. This type of solder is exempted from the RoHS Directive.