



Representative pre-arcing time-current characteristics

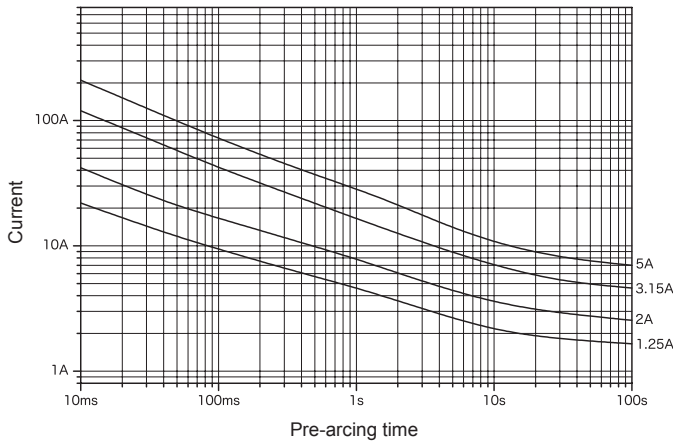

Scale: 1/1 (mm)

Rated voltage	Certification	Rated current (I _N) ^{*1}	Rated breaking current		Temp. rise	Current carrying capacity	Overload operation
AC 250 V	UL, SFA	62 mA–3 A	100 A	PF 0.7–0.8	70 K or less at 1.1 I _N	1.1 I _N for 15 min or more after temperature stabilization occurs	Within 60 min at 1.35 I _N 5 s–2 min at 2.0 I _N
	RU, SFA	Over 3 A–5 A			70 K or less at 1.0 I _N	1.0 I _N for 15 min or more after temperature stabilization occurs	Within 60 min at 1.35 I _N 12 s–2 min at 2.0 I _N
	PS E ^{*2}	62 mA–5 A			At 1.1 I _N , 140 K or less at the center, 60 K or less at the contact	1.1 I _N until constant temperature is obtained on each part	Within 60 min at 1.35 I _N Within 2 min at 2.0 I _N

^{*1}: Customer-requested rated current values can be supplied from within the given range.

^{*2}: Fuses with rated currents of less than 1 A are not considered electrical products per the Electrical Appliance and Material Safety Law.

^{*3}: This product uses high melting temperature type solder containing 85% by weight or more lead. This type of solder is exempted from the RoHS Directive.