
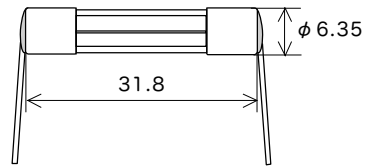


Representative pre-arcing time-current characteristics


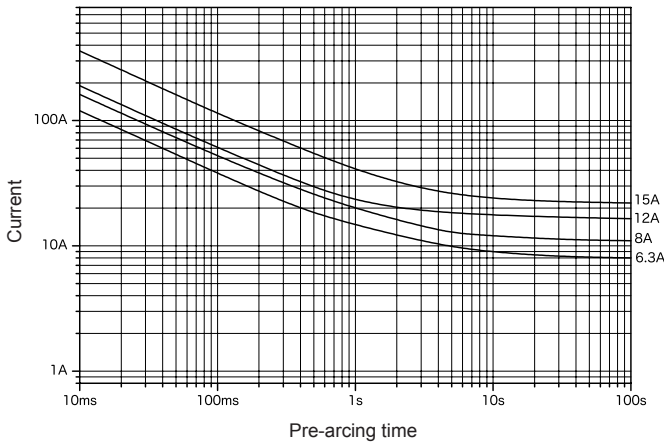


Lead wire diameter ϕ 0.8 (Over 5 A–8 A) ϕ 1.0 (Over 8 A–15 A) Scale: 1/1 (mm)

Rated voltage	Certification	Rated current (I_N) *1	Rated breaking current	Temp. rise	Current carrying capacity	Overload operation
AC 250 V	UL, SA	Over 5 A–8 A	200 A	PF 0.7–0.8	70 K or less at 1.1 I_N	Within 60 min at 1.35 I_N Within 2 min at 2.0 I_N
AC 125 V	RU, SA	Over 8 A–15 A	10000 A		70 K or less at 1.0 I_N	

*1: Customer-requested rated current values can be supplied from within the given range.
 *2: Over 5 A–8 A Pb free
 Over 8 A–15 A This product uses high melting temperature type solder containing 85% by weight or more lead. This type of solder is exempted from the RoHS Directive.

Representative pre-arcing time-current characteristics

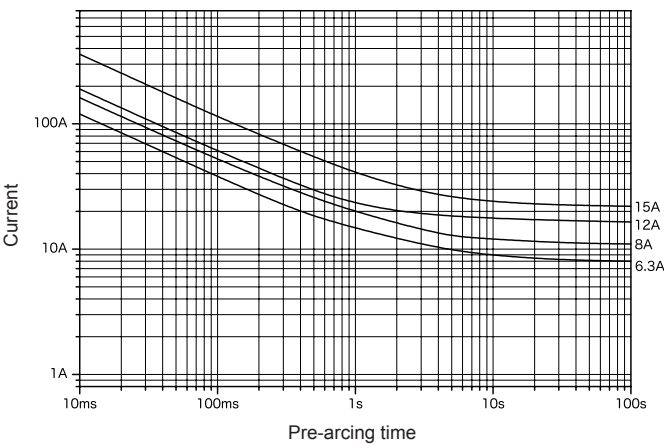

Scale: 1/1 (mm)

Rated voltage	Certification	Rated current (I_N) *1	Rated breaking current	Temp. rise	Current carrying capacity	Overload operation
AC 250 V	UL, SA	Over 5 A–8 A	200 A	PF 0.7–0.8	70 K or less at 1.1 I_N	Within 60 min at 1.35 I_N Within 2 min at 2.0 I_N
AC 125 V	RU, SA	Over 8 A–15 A	10000 A		70 K or less at 1.0 I_N	

*1: Customer-requested rated current values can be supplied from within the given range.
 *2: Over 5 A–8 A Pb free
 Over 8 A–15 A This product uses high melting temperature type solder containing 85% by weight or more lead. This type of solder is exempted from the RoHS Directive.