
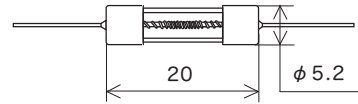


Representative pre-arcing time-current characteristics

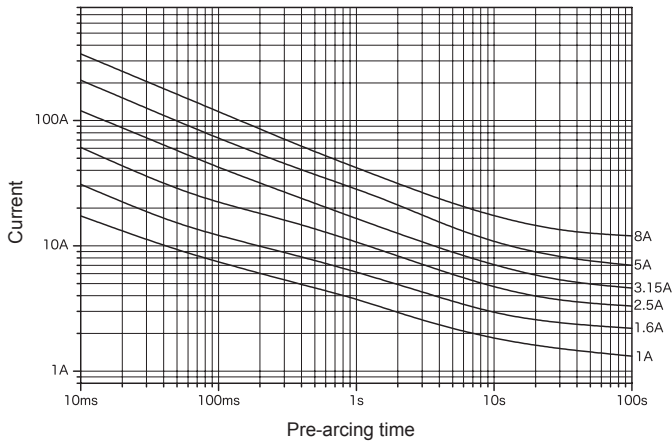

Lead wire diameter  $\phi$  0.8

Scale: 1/1 (mm)

Rated voltage	Certification	Rated current (I <sub>N</sub> ) <sup>*1</sup>	Rated breaking current		Temp. rise	Current carrying capacity	Overload operation
AC 250 V		62 mA–3 A	100 A	PF 0.7–0.8	70 K or less at 1.1 I <sub>N</sub>	1.1 I <sub>N</sub> for 15 min or more after temperature stabilization occurs	Within 60 min at 1.35 I <sub>N</sub> 5 s–2 min at 2.0 I <sub>N</sub>
		Over 3 A–8 A			70 K or less at 1.0 I <sub>N</sub>	1.0 I <sub>N</sub> for 15 min or more after temperature stabilization occurs	Within 60 min at 1.35 I <sub>N</sub> 12 s–2 min at 2.0 I <sub>N</sub>
		62 mA–8 A			At 1.1 I <sub>N</sub> , 140 K or less at the center, 60 K or less at the contact	1.1 I <sub>N</sub> until constant temperature is obtained on each part	Within 60 min at 1.35 I <sub>N</sub> Within 2 min at 2.0 I <sub>N</sub>

<sup>\*1</sup>: Customer-requested rated current values can be supplied from within the given range.

<sup>\*2</sup>: Fuses with rated currents of less than 1 A are not considered electrical products per the Electrical Appliance and Material Safety Law.

<sup>\*3</sup>: This product uses high melting temperature type solder containing 85% by weight or more lead. This type of solder is exempted from the RoHS Directive.